

HOLDING SYSTEM - CAMA FIX TRI SERIES



FIX TRI 38-53



FIX TRI



APPLICATION

Cable Holding System for fixing cables. Suitable for mounting 3 single- and medium- and high-voltage cables.

ADVANTAGES

Resistant to oils, greases, frost, heat, UV, ozone, salt water, salts, acids, aggressive chemicals and radioactive radiation. Non-oxidizing, non-corrosive, non-magnetic and non-conductive. Halogen-free and no sharp edges. Lifetime warranty, easy assembly and available worldwide.

SPEZIFICATION:

- Material:** Black polyamide (PA66), fibreglass-reinforced, virgin
- Range:** 25 to 98mm (for cables with a nominal outer diameter)
- Fire resistance:** UL94 V-0
DIN 5510-2:2009 with flammability class S3
Smoke SR2
dripping ST-2
- Standards:** NEN-EN-IEC 61914:2016 (according)
- Temperature:** -80 °C to +120 °C (Permanent application)
up to +220 °C (Short-term heating)

Extra possibilities:

The central fastening hole in the bottom part of this TRI clamp enables more installation possibilities for e.g. masts, poles, concrete or fitting rails. The 4 holes in the upper and bottom part of this clamp can be used for installation on all kinds of ladders and other support systems without drilling holes.

Description	Article No	For Cable Ø	Color	Packing unit
FIX TRI 25-40	4099025	25 - 40mm	Black	25 pcs
FIX TRI 38-53	4099026	38 - 53mm	Black	25 pcs
FIX TRI 53-66	4099027	53 - 66mm	Black	20 pcs
FIX TRI 67-82	4099028	67 - 82mm	Black	8 pcs
FIX TRI 82-98	4099029	82 - 98mm	Black	10 pcs



FIX TRI 25-40
FIX TRI 38-53




FIX TRI 53-66
FIX TRI 67-82




FIX TRI 82-98

HOLDING SYSTEM - CAMA FIX TRI SERIES


Description	DØ mm	L mm	B mm	I mm	dØ mm	H1 mm	H2 mm	h mm	A mm	C mm	I2 mm	J mm	kdØ mm	Strength N
FIX TRI 25-40	3x 25-40	160	75	125	14,5	68-95	14	38	20,0	15	131,5	49	6,5	40 000
FIX TRI 38-53	3x 38-53	183	78	145	15,0	82-116	23	41	23,5	15	154,0	51	6,6	48 800

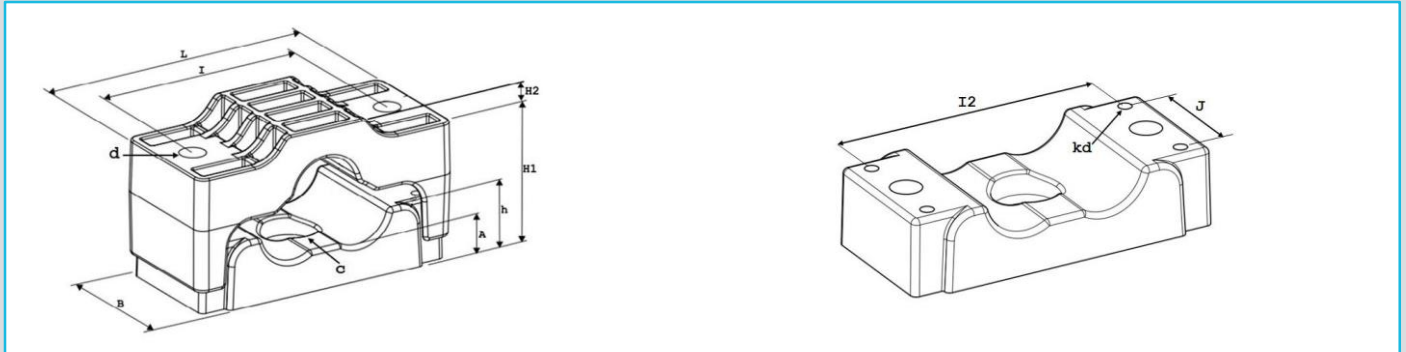

Description	DØ mm	L mm	B mm	I mm	dØ mm	H1 mm	H2 mm	h mm	A mm	C mm	Strength N
FIX TRI 53-66	3 x 53-66	216	80	169	15	100-120	44	44	25	15,5	69 000

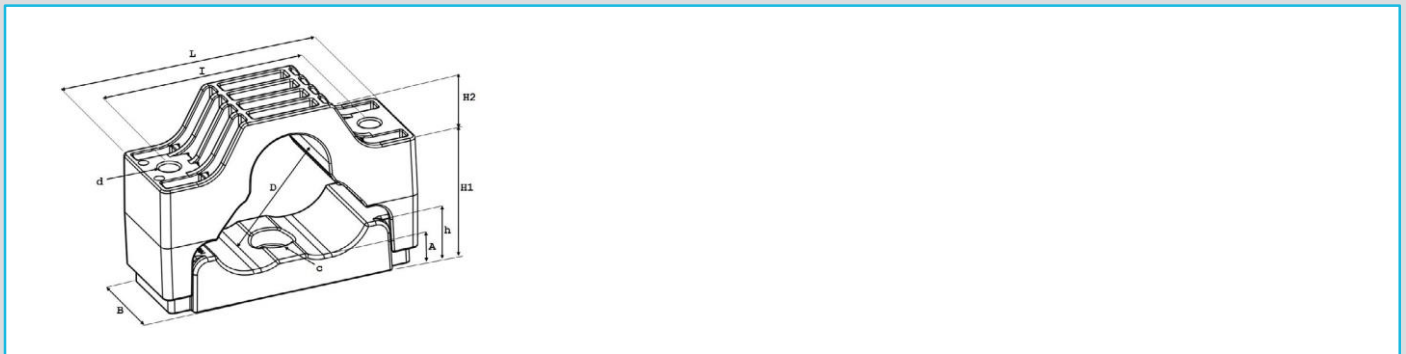

Description	DØ mm	L mm	B mm	I mm	dØ mm	H1 mm	H2 mm	h mm	A mm	C mm	I2 mm	J mm	kdØ mm	Strength N
FIX TRI 67-82	3x 67-82	250	90	200	16,5	130-164	44,3	61,5	26	16,5	216	60,00	8,5	55 600
FIX TRI 82-98	3x 82-98	282	100	234	16,5	125-160	79,5	69,5	26	16,5	222	69,15	10,5	52 900

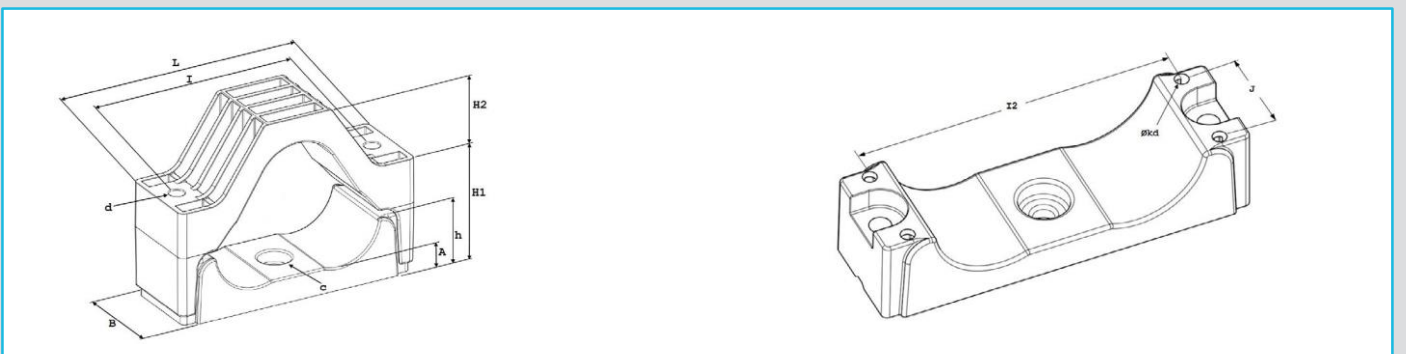

Initial torque for fastening fixing material : 5 - 8 Nm. (depends on cable manufacturer's prescription). Tests have been performed by KEMA, SGS, KU Leuven, UL and Schneider. The product listed in this datasheet is produced in conformity with the latest EU Directive 2011/65 / EU (RoHS), and complies with all legal obligations in accordance with REACH