

CAMA MINI



CAMA MINI FRAMES

Split cable entry frame for cable entry with and without plug from 3 - 33 mm cable diameter. Due to the flexible internal division of the frame, only one frame per cut-out size is required. It goes without saying that each frame fits the standardized cut-out dimensions and hole patterns. The integrated elastomer seal reliably seals up to IP 66 - no further seals are required

Features:

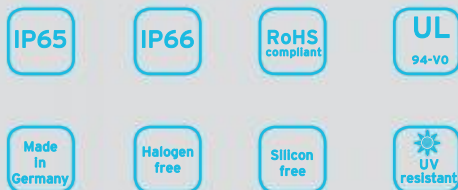
- Flexible and demand-oriented fitting of the frame - subsequent changes also possible
- Retrofitting can be carried out without any problems
- Simple assembly
- Obtaining the warranty of cables with plug due to uninterrupted cable routing
- Suitable for all common standard cut-out dimensions and drilling patterns
- IP 65 and IP 66
- Suitable grommets GS and GL series
- For cut-out sizes up to 50 x 115 mm

Specification:

Material:	Polyamide
Fire Class:	UL 94-V0, self-extinguishing*
Protection Class:	IP65 and IP66
Temperature range:	-50°C to +100°C (static)
Height:	20 mm
Property:	Halogen- and silicone-free, increased UV resistance

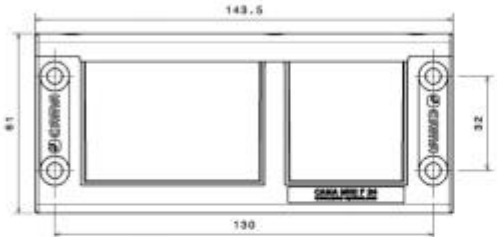
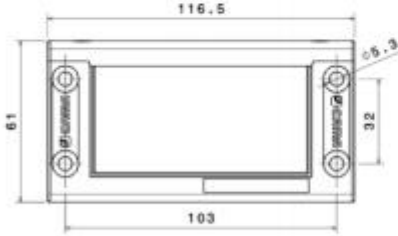
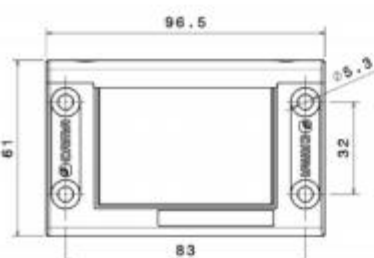
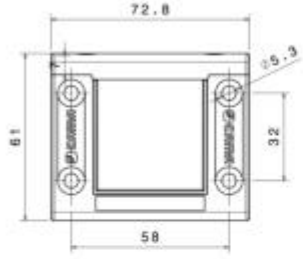
Accessories

Suitable grommets GS and GL

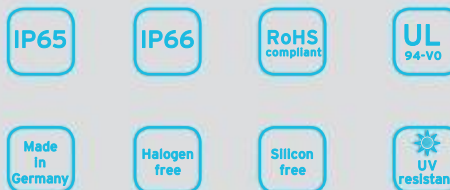


CAMA MINI

CAMA MINI FRAMES

	Description	Article no	PU/pcs
	MINI F24	1010013	10
	MINI F16	1010012	10
	MINI F10	1010011	10
	MINI F4	1010010	10

CAMA MINI



CAMA MINI GROMMETS GS + GL

Grommets to feed cables with and without plugs from 3 - 33 mm cable diameter for use with Mini frames (F24 - F4). Due to the flexible sealing lip geometry, deviations of the cable diameter up to 0.4 mm from the nominal dimension can be reliably sealed up to IP 66. For particularly high requirements, the strain relief can be provided separately.

Features:

- Large selection of grommets
- Obtaining the guarantee of cables with plug by uninterrupted cable routing
- IP 65 and IP 66
- Suitable for CAMA Mini series
- GS grommets cover the cable diameter range from 3 - 16 mm, GL grommets from 16 - 33

Specification:

Material:	Elastomer
Fire Class:	UL 94-V0, self-extinguishing*
Protection Class:	IP65 and IP66 (with single grommets GS and GL)
Temperature range:	-50°C to +100°C (static)
Property:	Halogen- and silicone-free, increased UV resistance

Suitable for :

Mini frames



CAMA MINI

CAMA MINI GROMMETS GS + GL



Description	Article no	Cable	PU/pcs	Description	Article no	Cable	PU/pcs
<u>SMALL GROMMETS</u>				<u>LARGE GROMMETS</u>			
MINI GS 0	1010030	1	20	MINI GL 16-17	1010060	1	10
MINI GS 3-4	1010031	1	20	MINI GL 17-18	1010061	1	10
MINI GS 4-5	1010032	1	20	MINI GL 18-19	1010062	1	10
MINI GS 5-6	1010033	1	20	MINI GL 19-20	1010063	1	10
MINI GS 6-7	1010034	1	20	MINI GL 20-21	1010064	1	10
MINI GS 7-8	1010035	1	20	MINI GL 21-22	1010065	1	10
MINI GS 8-9	1010036	1	20	MINI GL 22-23	1010066	1	10
MINI GS 9-10	1010037	1	20	MINI GL 23-24	1010067	1	10
MINI GS 10-11	1010038	1	20	MINI GL 24-25	1010068	1	10
MINI GS 11-12	1010038	1	20	MINI GL 25-26	1010069	1	10
MINI GS 12-13	1010040	1	20	MINI GL 26-27	1010070	1	10
MINI GS 13-14	1010041	1	20	MINI GL 27-28	1010071	1	10
MINI GS 14-15	1010042	1	20	MINI GL 28-29	1010072	1	10
MINI GS 15-16	1010043	1	20	MINI GL 29-30	1010073	1	10
MINI GS 2/4-5	1010044	2	20	MINI GL 30-31	1010074	1	10
MINI GS 2/5-6	1010045	2	20	MINI GL 31-32	1010074	1	10
MINI GS 2/6-7	1010046	2	20	MINI GL 32-33	1010076	1	10
MINI GS 2/7-8	1010047	2	20				
MINI GS 4/4-5	1010048	4	20				
MINI GS 4/5-6	1010049	4	20				